


LED STREET LIGHTING

|                                                                                              |                   |                    |                                                                                             |                                                                                                  |                                                                                             |
|----------------------------------------------------------------------------------------------|-------------------|--------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|  AC100-305V | <b>CRI</b><br>>80 | <b>PF</b><br>>0.95 |  10%~90% |  +50℃<br>-35℃ |  50,000h |
|----------------------------------------------------------------------------------------------|-------------------|--------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|

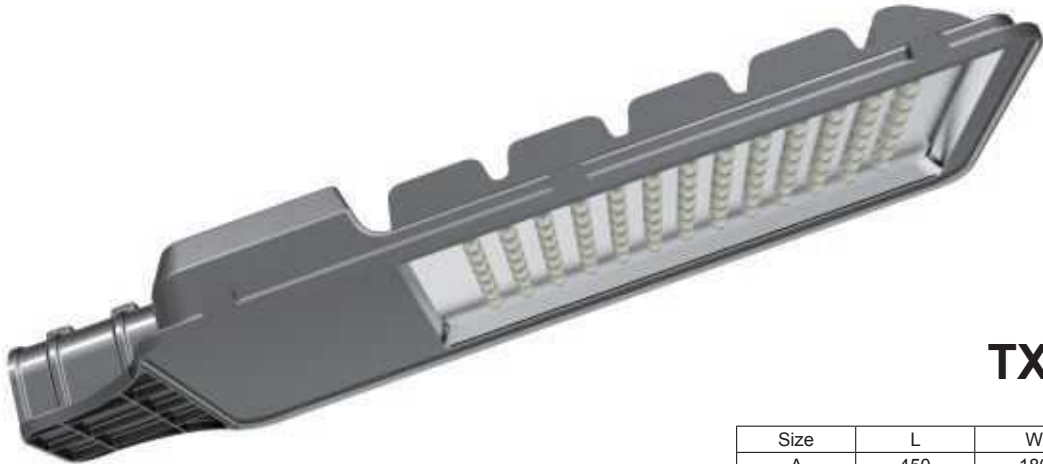


TXLED-05


| Size | L   | W   | H  |
|------|-----|-----|----|
| A    | 450 | 180 | 52 |
| B    | 550 | 210 | 55 |
| C    | 680 | 278 | 80 |
| D    | 780 | 278 | 80 |
| E    | 975 | 380 | 94 |




TXLED-05(A)




TXLED-05(B)





TXLED-05(C)



TXLED-05(D)

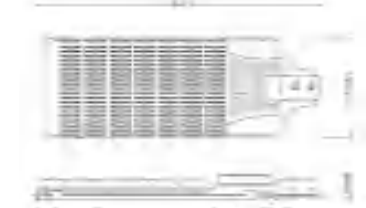

TXLED-05(E)

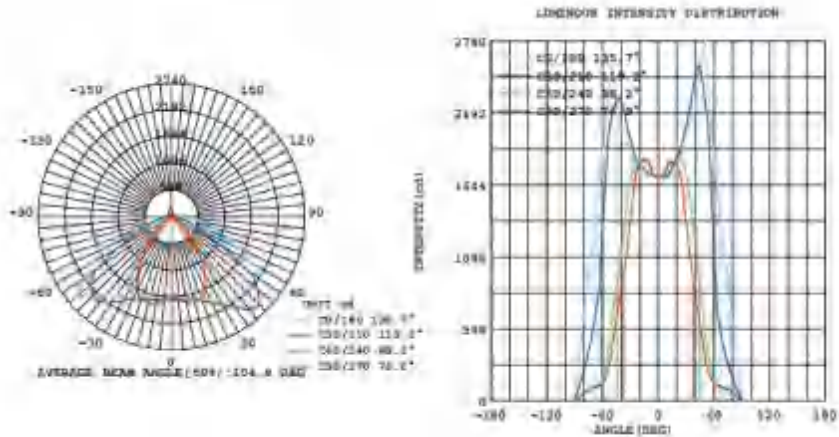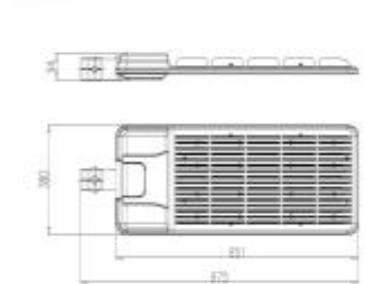

TECHNICAL SPECIFICATION

|                           |                           |
|---------------------------|---------------------------|
| Product Name              | TXLED-05 A/B/C/D/E        |
| Max Power                 | 30w/60w/120w/200w/300w    |
| Supply voltage range      | 100-305V AC               |
| Temperature range         | -25℃/+55℃                 |
| Light guiding system      | PC lenses                 |
| Light source              | LUXEON 3030               |
| Color temperature         | 3000-6500k                |
| Color rendering index     | >80RA                     |
| Lumen                     | ≥110 lm/w                 |
| LED luminous efficiency   | 90%                       |
| Lightning protection      | 10KV                      |
| Service life              | Min 50000 hours           |
| Housing material          | Die-cast aluminum         |
| Sealing material          | Silicone rubber           |
| Cover material            | Tempered glass            |
| Housing color             | As customer's requirement |
| Protection class          | IP66                      |
| Mounting diameter option  | Φ60mm                     |
| Suggested mounting height | 5-12m                     |