


**LED STREET LIGHTING**


AC100-305V	CRI >80	PF >0.95	10%~90%	+50°C -35°C	50,000h
------------	---------	----------	---------	----------------	---------




TXLED-10(A)

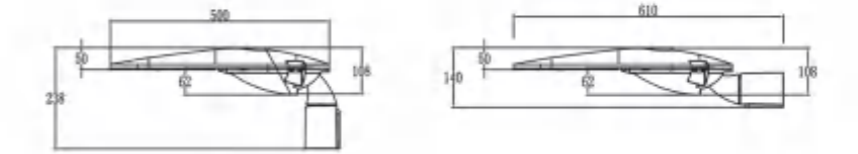

TXLED-10(B)

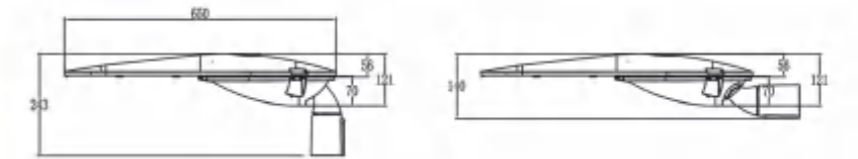

TXLED-10(C)

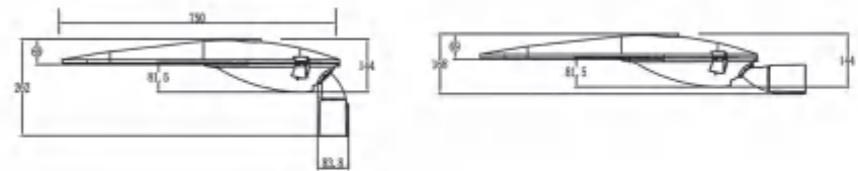

**TECHNICAL SPECIFICATION**

Product Name	TXLED-10A	TXLED-10B	TXLED-10C
Max Power	80w	150w	220w
LED chip quantity	36pcs	64pcs	100pcs
Supply voltage range	100-305V AC		
Temperature range	-25°C/+55°C		
Light guiding system	PC lenses		
Light source	LUXEON 5050/3030		
Color temperature	3000-6500k		
Color rendering index	>80RA		
Lumen	≥110 lm/w		
LED luminous efficiency	90%		
Lightning protection	10KV		
Service life	Min 50000 hours		
Housing material	Die-cast aluminum		
Sealing material	Silicone rubber		
Cover material	Tempered glass		
Housing color	As customer's requirement		
Protection class	IP66		
Mounting diameter option	Φ60mm		
Suggested mounting height	6-9m	9-12m	10-12m
Dimension(L*W*H)	610*270*140mm	765*320*140mm	866*372*168mm

